

Scramble High Score Save Kit



Installation Instructions

Features

1. Saves High Score Table *
2. New Free Play Mode! **
3. Attract mode on during Coin / Free Play
4. Rom Saver

* To clear the high score table hold down Fire + Bomb while the game is booting up

** To enable free play mode use the 4 coins for one play dip switch setting (Dip Switch 4 and 5 are off)


Step 1

Remove the PCB from the cabinet and separate the two boards




Step 2

Remove the z80 from the bottom board. In many cases this may not have a socket and you will need to de-solder the z80 and put a socket in its place. The easiest way to do this is clip the pins off the z80 and de-solder each pin one at a time. If you do not feel comfortable doing this on your own then contact Slava Madrit at smadrit@gmail.com for a quote on doing this for you

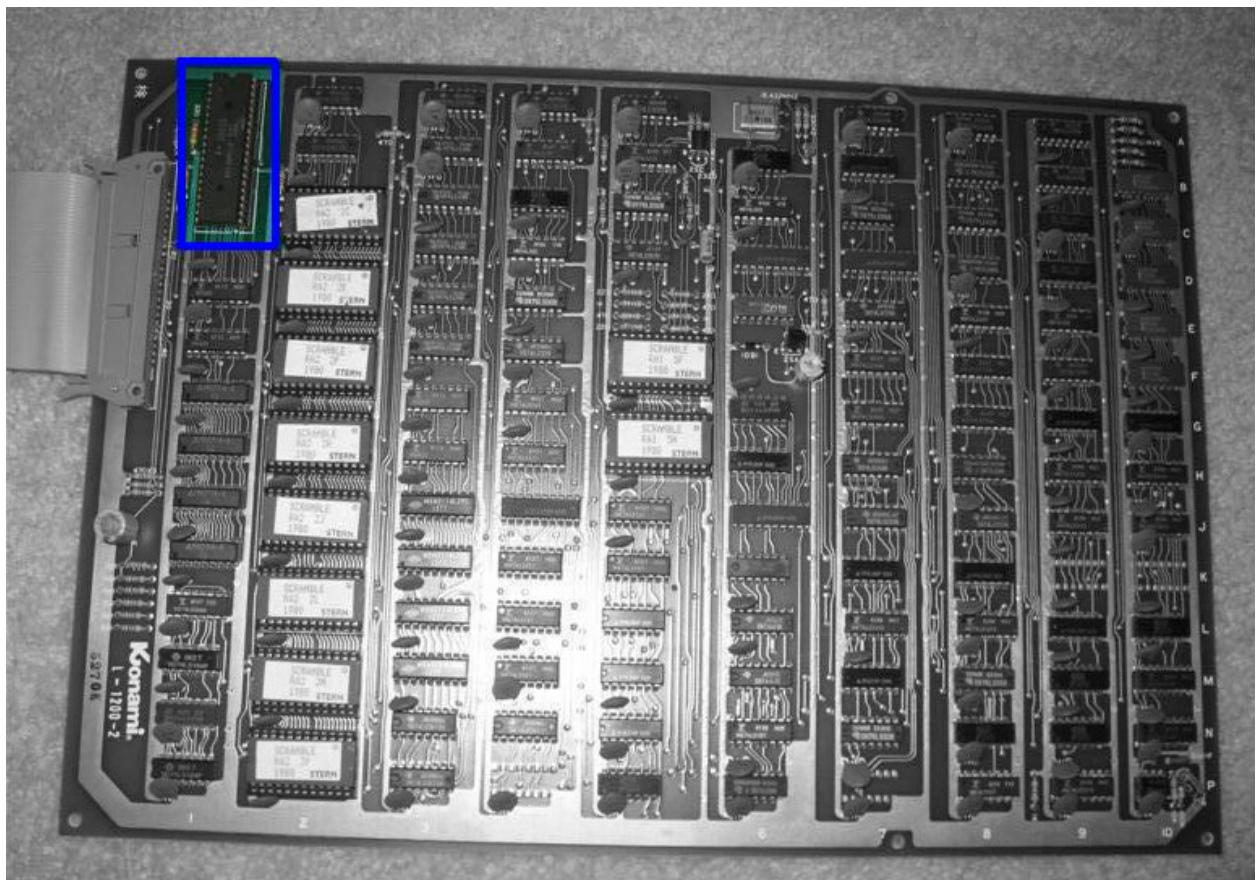

Step 3

This next step is optional but highly recommended as the HSS board will fit better and the old eproms will not be sucking power from the board. If you choose to you can remove the following 8 eproms.

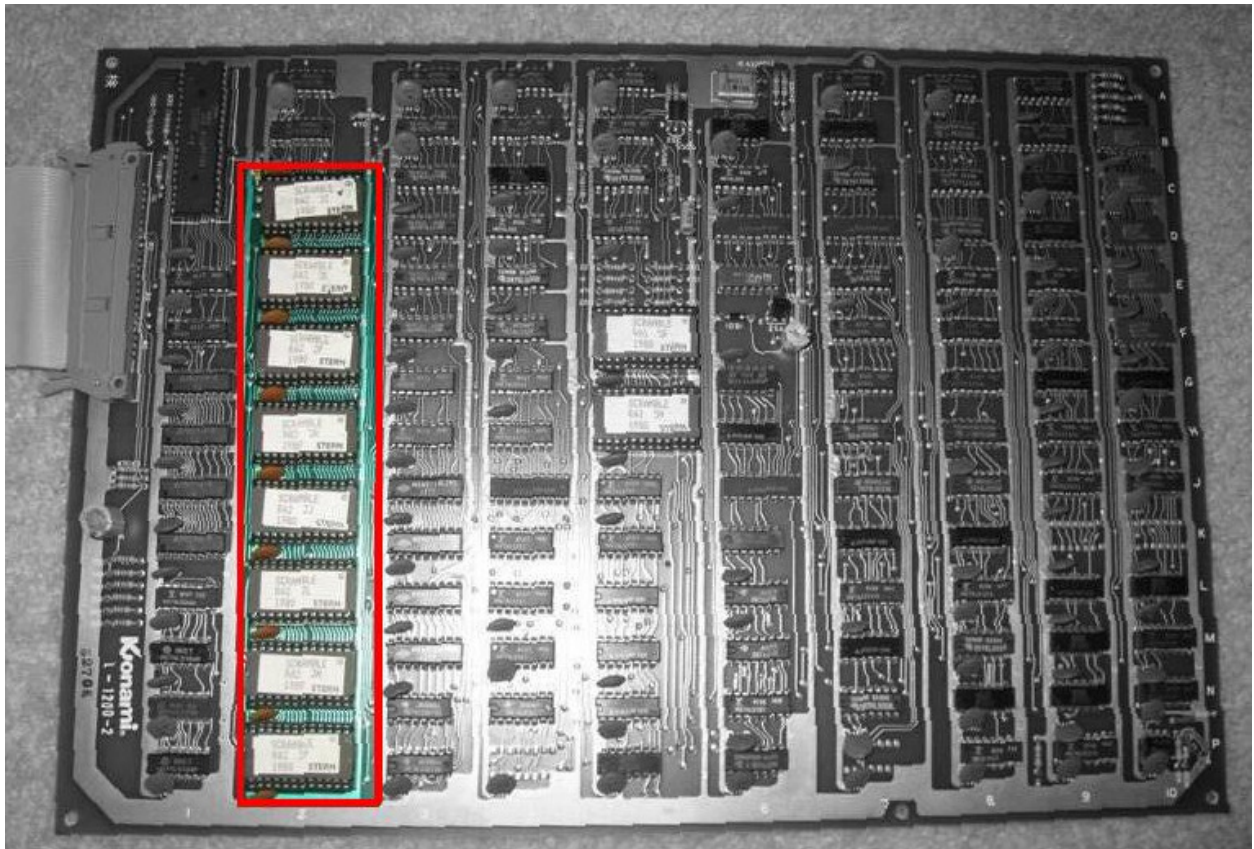

Step 4

Place the z80 on to the HSS Kit. You may need to obtain a new z80 if you had to clip the existing one from the game pcb to add a socket. Make sure no pins get bent and the notch is facing the correct direction



Step 5

Place the HSS kit into the empty z80 socket.

It should look like the picture below.



Step 6

Attach the two boards back together and return back into the cabinet. You may need to change the spacers on the board if the original ones are not long enough to accommodate the HSS board.